



# SLH-28

Height adjustable pedestal

1678397518

## KEY FEATURES

- SLH adjustable pedestal system for supporting elevated floors of any kind, e.g. ceramic, concrete, woods, composite. It is manufactured out of UV-resistant PP, and it can be installed on any stable surface. In case of roof install, check the load bearing capacity of the thermal insulation.

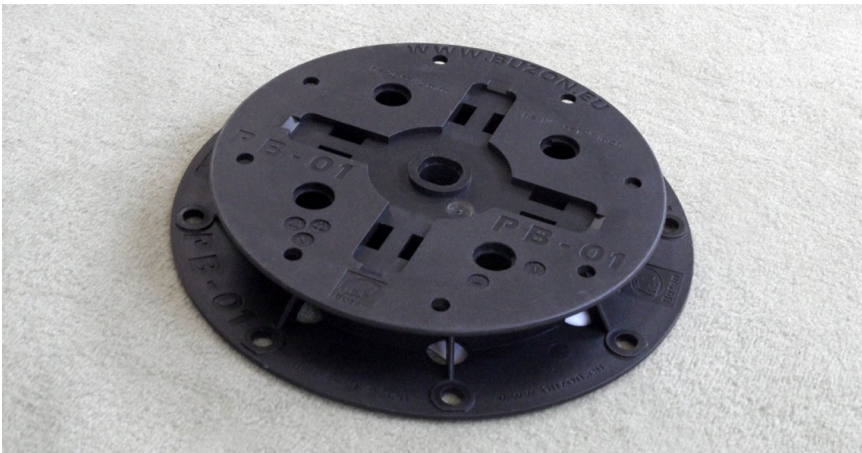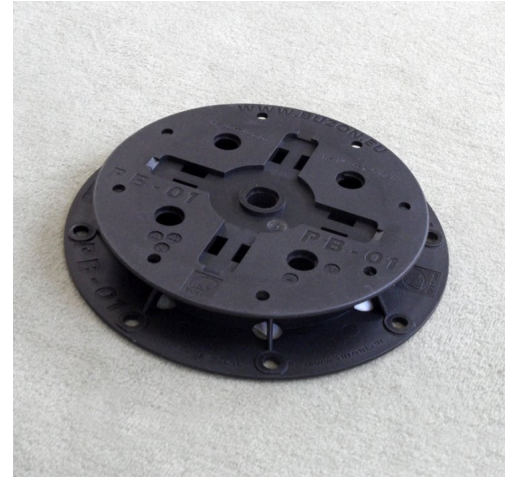

## APPLICATION

Terraces, Balconies, Rooftop Amenity Spaces, Public Squares, Commercial Building Floors, Fountains, Water Features, Decking

## SPECIFICATION

Continuously height adjustable polypropylene pedestal system, designed for constructing elevated floors. UV and chemical resistant. Foot diameter of the unit: 220 mm; height: 28-42 mm; load-bearing capacity: 1.200 kg/pedestal; weight: ca. 0.232 kg/piece.



## TECHNICAL DATA

Loadbearing Capacity: (kg)	1200
Height: (mm)	28 - 42
Foot Diameter: (mm)	220
Weight: (kg)	0,232
Material:	Polypropylene
Colour:	black
Packaging unit: (pieces/carton)	84
Coverage rate: (h/piece)	0,08

Reviewed: 2023-03-09 16:31:58



DIADEM USA, Inc.  
8795 SW Tualatin Sherwood Rd #1005, Tualatin, OR 97062  
info@diademusa.com • www.diademusa.com



Green Up the Roof!