



# FK-5

Slab spacers for the perfect drainage of paved areas

610101

## KEY FEATURES

- Increases a drainage capacity of the paved areas
- Same product for cross and T-joint spacers
- Purposely broken spacers can be reused
- Available in 4 joint sizes and two different colors
- Future slab repairs can be carried out more easily

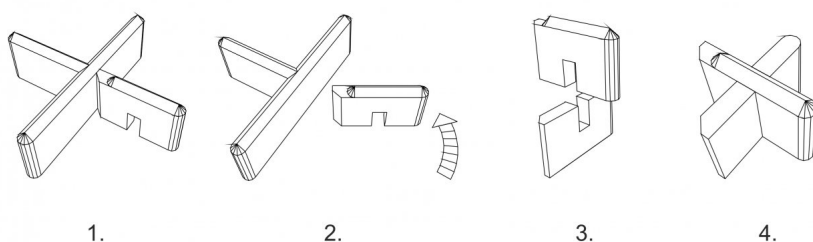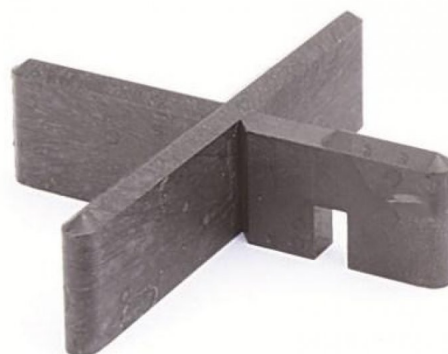

## APPLICATION

Paving slabs for terraces on building structures must be loose laid with permanent spacing between the slabs. Providing a permanent space between slabs enhances drainage properties even on sandbed or substrate. Ensuring equal spacing between the slabs and increasing the aesthetic value of the overall paving layout by forming a distinctively clear and even pattern.

## SPECIFICATION

FK-5 slab spacer ensures an equal 3/16" spacing between the slabs and increases the aesthetic value of the overall paving layout by forming a distinctively clear and even pattern.



## TECHNICAL DATA

Thickness: (inch)	3/16
Height: (inch)	3/4
Width: (inch)	2-3/4
Length: (inch)	2-3/4
Material:	Recycling-Polystyrene
Color:	black
Need at 24x24" slabs: (pcs / sqf)	0.25
Need at 18x18" slabs: (pcs / sqf)	0.44
Packaging unit: (pcs / box)	1,600
Weight: (lbs / box)	51.58

Reviewed: 2014-11-26 15:24:11



DIADEM USA, Inc.  
721 NW Ninth Avenue, Suite 400, Portland, OR-97209  
info@diademusa.com • www.diademusa.com



Green Up the Roof!