


SLH-28

Height adjustable pedestal

1678397518


KEY FEATURES

- SLH adjustable pedestal system for supporting elevated floors of any kind, e.g. ceramic, concrete, woods, composite. It is manufactured out of UV-resistant PP, and it can be installed on any stable surface. In case of roof install, check the load bearing capacity of the thermal insulation.

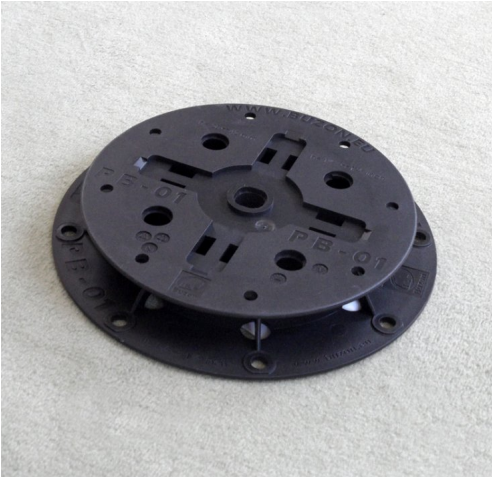

APPLICATION

Terrances, Balconies, Rooftop Amenity Spaces, PublicSquares, CommercialBuilding Floors, Fountains, WaterFeatures, Decking

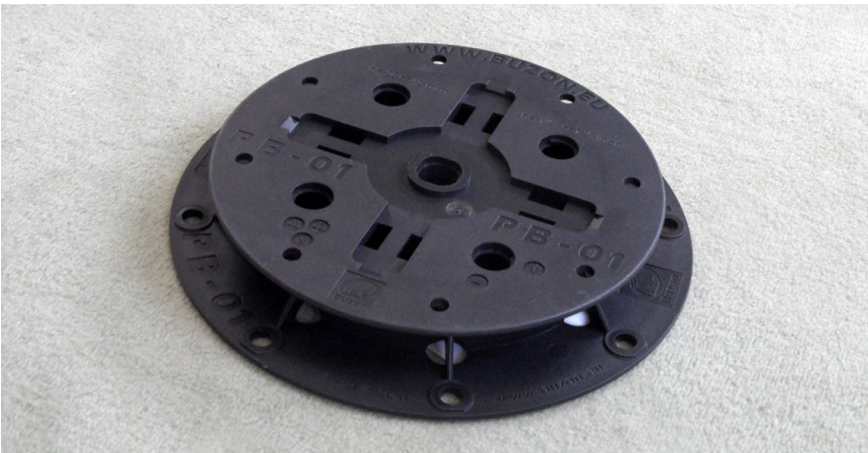

SPECIFICATION


Continuously height adjustable polypropylene pedestal system, designed for constructing elevated floors. UV and chemical resistant. Foot diameter of the unit: 220 mm; height: 28-42 mm; load-bearing capacity: 1.200 kg/pedestal; weight: ca. 0.232 kg/piece.



TECHNICAL DATA

Loadbearing Capacity: (kg)	1200
Height: (mm)	28 - 42
Foot Diameter: (mm)	220
Weight: (kg)	0,232
Material:	Polypropylene
Colour:	black
Packaging unit: (pieces/carton)	84
Coverage rate: (h/piece)	0,08

Reviewed: 2023-03-09 16:31:58



DIADEM USA, Inc.
8795 SW Tualatin Sherwood Rd #1005, Tualatin, OR 97062
info@diademusa.com • www.diademusa.com



Green Up the Roof!