



# FK-3

Slab spacers for the perfect drainage of paved areas

610102

## KEY FEATURES

- Increases a drainage capacity of the paved areas
- Same product for cross and T-joint spacers
- Purposely broken spacers can be reused
- Available in 4 joint sizes and two different colors.
- Future slab repairs can be carried out more easily

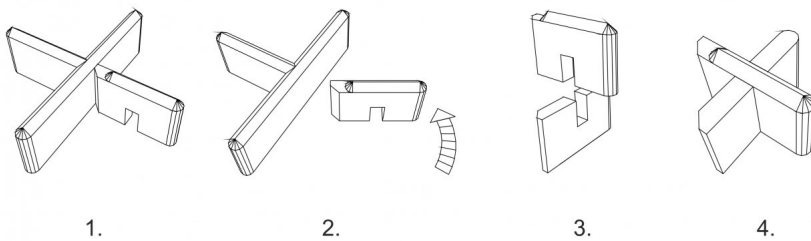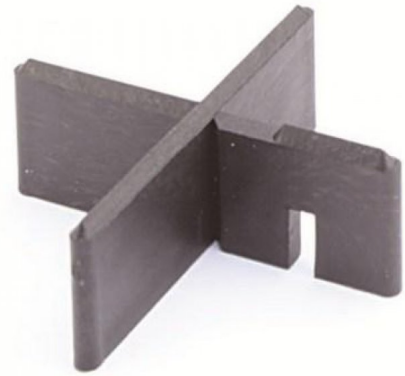

## APPLICATION

Paving slabs for terraces on building structures must be loose laid with permanent spacing between the slabs. Providing a permanent space between slabs enhances drainage properties even on sandbed or substrate. Ensuring equal spacing between the slabs and increasing the aesthetic value of the overall paving layout by forming a distinctively clear and even pattern.

## SPECIFICATION

### TECHNICAL DATA

|                                 |                      |
|---------------------------------|----------------------|
| Height: (mm)                    | 18                   |
| Width: (mm)                     | 50                   |
| Length: (mm)                    | 50                   |
| Weight: (kg/unit)               | 0,55                 |
| Material:                       | Recycling-Polystyrol |
| Colour:                         | black                |
| Packaging unit: (pieces/carton) | 3000 (30x100)        |

Reviewed: 2014-11-27 09:58:21



DIADEM USA, Inc.  
8795 SW Tualatin Sherwood Rd #1005, Tualatin, OR 97062  
info@diademusa.com • www.diademusa.com



Green Up the Roof!