



# FK-10

FK-10 slab spacers for the perfect drainage of paved areas.

610103

## KEY FEATURES

- Increases a drainage capacity of the paved areas
- Same product for cross and T-joint spacers
- Purposely broken spacers can be reused
- Available in 4 joint sizes and two different colors.
- Future slab repairs can be carried out more easily

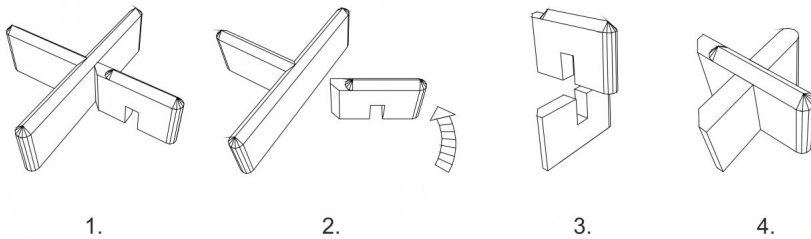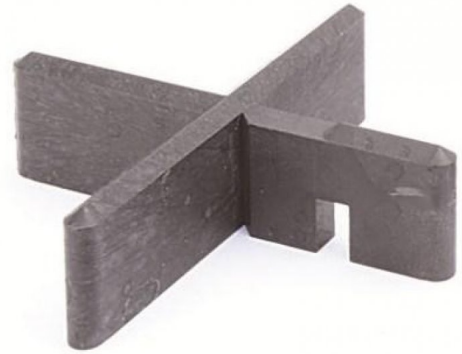

## APPLICATION

Paving slabs for terraces on building structures must be loose laid with permanent spacing between the slabs. Providing a permanent space between slabs enhances drainage properties even on sandbed or substrate. Ensuring equal spacing between the slabs and increasing the aesthetic value of the overall paving layout by forming a distinctively clear and even pattern.

## SPECIFICATION

FK-10 slab spacer ensures an equal 3/8" spacing between the slabs and increases the aesthetic value of the overall paving layout by forming a distinctively clear and even pattern.

## TECHNICAL DATA

Thickness: (inch)	3/8
Length: (inch)	2-3/4
Width: (inch)	2-3/4
Height: (inch)	3/4
Weight: (lbs/box)	33.06
Packaging unit: (pcs / box)	1,000
Need at 24x24" slabs: (pcs / sqf)	0.25
Need at 18x18" slabs: (pcs / sqf)	0.44
Color:	black
Material:	Recycling-Polystyrene

Reviewed: 2012-07-20 02:52:46



DIADEM USA, Inc.  
8795 SW Tualatin Sherwood Rd #1005, Tualatin, OR 97062  
info@diademusa.com • www.diademusa.com



Green Up the Roof!