



FK-1,5

Slab spacers for the perfect drainage of paved areas

610114

KEY FEATURES

- Increases a drainage capacity of the paved areas
- Same product for cross and T-joint spacers
- Purposely broken spacers can be reused
- Available in 4 joint sizes and two different colors.
- Future slab repairs can be carried out more easily

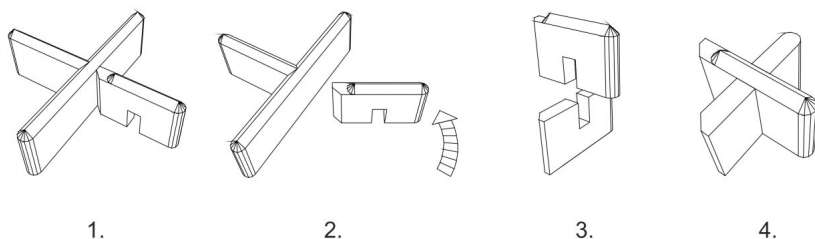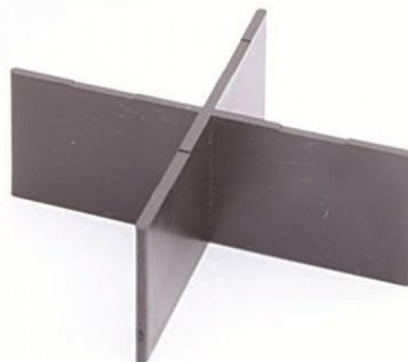

APPLICATION

Paving slabs for terraces on building structures must be loose laid with permanent spacing between the slabs. Providing a permanent space between slabs enhances drainage properties even on sandbed or substrate. Ensuring equal spacing between the slabs and increasing the aesthetic value of the overall paving layout by forming a distinctively clear and even pattern.



SPECIFICATION

TECHNICAL DATA

Height: (mm)	18
Width: (mm)	50
Length: (mm)	50
Weigth: (kg/unit)	0.55
Material:	Recycling-Polystyrol
Colour:	black
Packaging unit: (pieces/carton)	4000 (20x200)
Reviewed: 2011-09-20 13:19:02	



DIADEM USA, Inc.
8795 SW Tualatin Sherwood Rd #1005, Tualatin, OR 97062
info@diademusa.com • www.diademusa.com



Green Up the Roof!